SURFACE LED DOWNLIGHT · OUTDOOR · SURFACE, CEILING

ORA

MK-SF-ORA-10

ORA is a robust Ø125 mm surface downlight for covered exterior spaces such as terraces, entrances and corridors. Its die-cast aluminium body delivers 3,500 lm at 35 W through precision optics in five beams, from a 15° accent to a 60° general flood, with IP65 protection.

IP65 · 5-YEAR WARRANTY · FIVE BEAM OPTIONS · GLASS FRONT · FOR COVERED OUTDOOR AREAS



35 W	3,500 lm	100 lm/W	3000–6000 K	>80	IP65
SYSTEM POWER	LUMINOUS FLUX	EFFICACY	CCT	CRI	PROTECTION

OPTICAL 7

Luminous flux	3,500 lm
Luminaire efficacy	100 lm/W
CCT	3000K / 4000K / 6000K
CRI	>80
Beam angle	15° 24° 38° 45° 60°
Optic / diffuser	Precision lens per LED, glass front
LED source	CREE LED

ELECTRICAL 4

System power	35 W
Input voltage	220–240 V AC
Driver	Integral
Control	ON / OFF

MECHANICAL 4

Mounting	Surface, ceiling
Housing	Die-cast aluminium
Finish	White / Black / Dark grey
Dimensions	Ø125 × 145 mm


ENVIRONMENT 4

IP rating	IP65
Operating temp.	-20 °C ~ +50 °C
Lifetime	50,000 h
Warranty	5 Years

FURTHER DATA 1


Previous code	MK-ORA-35-125

DIMENSIONS MM

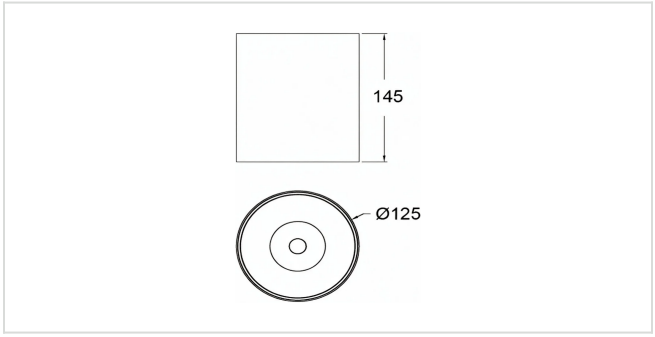

Ø125 × 145 mm

OPTICS

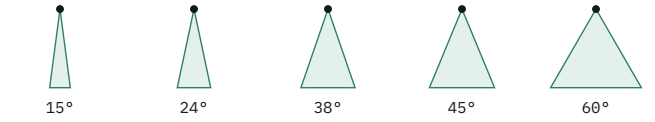

ORDERING CODE

MK-SF-ORA-10 | CCT | Beam | Finish

CCT		BEAM		FINISH	
30	3000K	15	15°	BK	Black
40	4000K	24	24°	DG	Dark grey
60	6000K	38	38°	WH	White
		45	45°		
		60	60°		

Example **MK-SF-ORA-10-30-15-BK**

INSTALLATION

- Fix to a solid ceiling surface
- Suitable for covered outdoor areas: terraces, entrances, gazebos