
RECESSED LED STEP LIGHT · OUTDOOR · RECESSED WALL / STEP, EMBEDDED BOX

ASCENT

MK-WR-ASC-10

ASCENT is a compact recessed step and wall light that washes stairs, paths and terraces with soft, asymmetric light while keeping the source out of view. A die-cast aluminium body with a glass diffuser and an embedded installation box gives a clean, flush finish in exterior and interior walls.

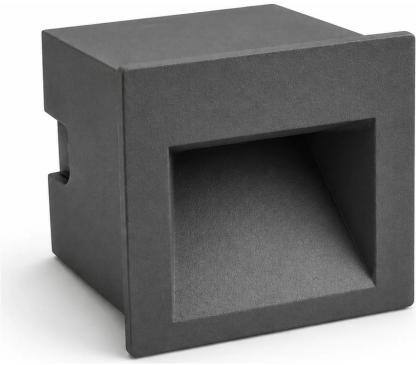

IP65 · 5-YEAR WARRANTY · ASYMMETRIC GLARE-FREE BEAM · GLASS DIFFUSER · EMBEDDED BOX INCLUDED

5 W	150 lm	30 lm/W	3000–6000 K	>80	IP65
SYSTEM POWER	LUMINOUS FLUX	EFFICACY	CCT	CRI	PROTECTION

OPTICAL 8

Luminous flux	150 lm
Luminaire efficacy	30 lm/W
CCT	3000K / 4000K / 6000K
CRI	>80
Beam angle	Asymmetric
Light distribution	Asymmetric, downward
Optic / diffuser	Precision lens per LED, glass diffuser
LED source	OSRAM LED


ELECTRICAL 4

System power	5 W
Input voltage	220–240 V AC
Driver	Integral
Control	ON / OFF

MECHANICAL 5

Mounting	Recessed wall / step, embedded box
Housing	Die-cast aluminium
Finish	Black / Dark grey / Light grey
Dimensions	75 × 75 × 70 mm
Cable / connection	Open wires

DIMENSIONS MM



75 × 75 × 70 mm

ENVIRONMENT 4

IP rating	IP65
Operating temp.	-20 °C ~ +50 °C
Lifetime	50,000 h
Warranty	5 Years

ASCENT

MK-WR-ASC-10

ORDERING CODE

MK-WR-ASC-10	CCT	Finish

CCT		FINISH	
30	3000K	BK	Black
40	4000K	DG	Dark grey
60	6000K	LG	Light grey

Example **MK-WR-ASC-10-30-BK**

FURTHER DATA

	3
Cut-out	68 × 68 × 70 mm
Dimming / emergency	Not available
Previous code	MK-ASC-05-75

INSTALLATION

- Install the embedded box during wall construction
- Cut-out 68 × 68 × 70 mm
- Connect open wires in a weatherproof junction
- Fix the luminaire into the box with the supplied screws

ACCESSORIES

- Embedded box and screws (supplied)